




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G10K 11/34, G01S 7/52, 15/89		A1	(11) International Publication Number: WO 00/68931
			(43) International Publication Date: 16 November 2000 (16.11.00)
(21) International Application Number: PCT/DK00/00245		(81) Designated States: AE, AG, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 10 May 2000 (10.05.00)			
(30) Priority Data: PA 1999 00635 10 May 1999 (10.05.99) DK			
(71) Applicant (for all designated States except US): B-K MEDICAL A/S [DK/DK]; Sandtoften 9, DK-2820 Gentofte (DK).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): JENSEN, Jørgen, Arendt [DK/DK]; Bygtoften 9, DK-2800 Lyngby (DK). NIKOLOV, Svetoslav [BG/DK]; Skovsvinget 20, DK-2800 Lyngby (DK).			
(74) Agent: HOFMAN-BANG A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: RECURSIVE ULTRASOUND IMAGING

(57) Abstract

A method and an apparatus for recursive ultrasound imaging is presented. The method uses a Synthetic Transmit Aperture, but unlike previous approaches a new frame is created at every pulse emission. In receive, parallel beam forming is implemented. The beam formed RF data is added to the previously created RF lines. To keep the level of the signal, the RF data obtained previously, when emitting with the same element is subtracted from the RF lines. Up to 5000 frames/sec can be achieved for a tissue depth of 15 cm with a speed of sound of $c = 1540$ m/s. The high frame rate makes continuous imaging data possible, which can significantly enhance flow imaging. A point spread function 2° wide at -6 dB and grating lobes of ≤ -50 dB is obtained with a 64 elements phased array with a central frequency $f_0 = 3$ MHz using a sparse transmit aperture using only 10 elements ($N_{\text{xmt}} = 10$) during pulse emission. The corresponding images have the quality of a dynamically focused image in transmit and receive. The dynamic focusing gives a small sampling volume and the capability to view small blood vessels and obtain the velocity profiles within the vessels with lower variance than with normal imaging.

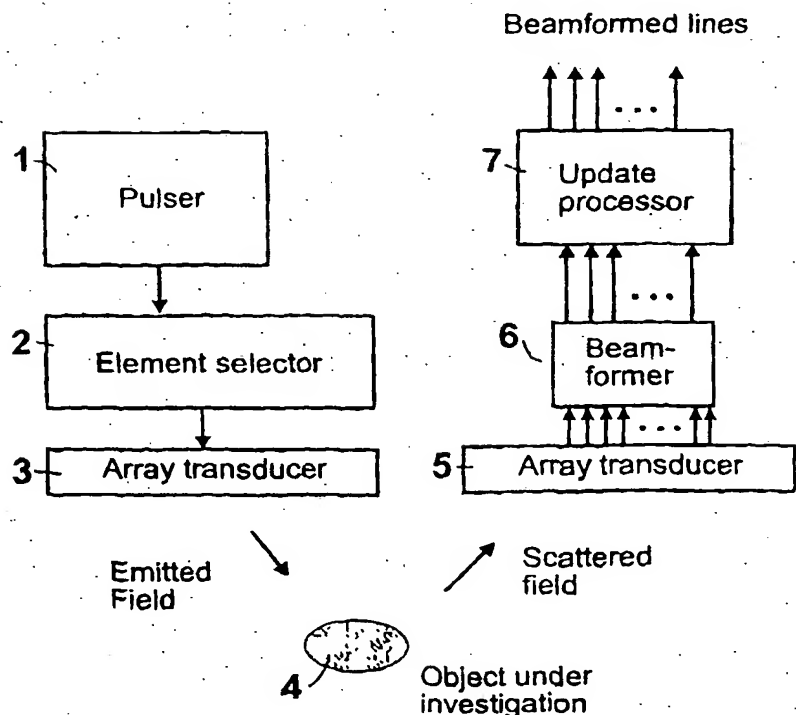

Schematic block diagram of the main components of the system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Recursive Ultrasound Imaging

Field of the invention

The invention relates to an apparatus for fast imaging of eg the human body using ultrasound.

- 5 The image is made using a multi-element probe in which all or selected ones of the elements are used as transmitters. The reflected signal from the object is then measured by all elements and ultrasound beams are simultaneously focused throughout the imaging region. The image is updated with the new information every time a new element or a group of elements are used as a transmitting aperture. Hereby
10 the image is continuously updated and can be used for probing moving structures and enhance the imaging of blood velocities.

Background of the invention

- The technological development has constantly led to improvements in ultrasound beam formers as described in [1]. The introduction of digital beam formers made the
15 dynamic receive focusing possible. Unfortunately it is not possible to dynamically control the transmitted acoustic energy, and only a fixed focus is used in transmit.

- The basic concept of focusing is to constructively add energy in the combined transmit-receive signal. Ideally, by means of the receive processing it is possible to compensate for the phase changes in the transmit. This corresponds to a dynamically
20 focused transmit and receive imaging system. A composite image (obtained by multiple emissions, focused at different depths in transmit) is the ideal reference image.

- One way to obtain a dynamic transmit focus is to use synthetic array imaging. There are three variations of the synthetic aperture imaging: 1: using a synthetic transmit
25 aperture, 2: using a synthetic receive aperture, and 3: using a combination of synthetic transmit-receive aperture. All of these combinations have been studied, and have shown different advantages and drawbacks. The time necessary to acquire a single image $T_{acquire\ image}$ is proportional to the number of emissions $N_{emission}$, the time

necessary to record the reflected ultrasound wave from a single emission $T_{record\ emission}$, the number of scan lines N_l , and it is inversely proportional to the number of the parallel receive beam formers $N_{parallel}$:

$$T_{acquireimage} = T_{acquirescanline} \cdot N_{emission} \cdot N_l / N_{parallel} \quad (1)$$

- 5 The acquisition time for an image, with a typical depth of 15 cm assuming that the speed of sound is 1540 m/s, is 200 μ s. If $N_{emission} = 64$ and $N_l = N_{parallel}$ then $T_{acquire\ image} = 12.8$ ms, which results in 78 frames/sec. For every new frame in the imaging process, the data acquired for the previous frame is discarded.

- The recursive imaging method and apparatus according to the invention uses the beam
10 formed lines from the previous frame to create a new frame after every emission. This results in $N_{emission} = 1$, $T_{acquire\ image} = 200$ μ s, and a frame rate of 5000 frames/sec. The invention uses a synthetic transmit aperture and preferably receives with the full aperture. The prior art synthetic transmit aperture focusing [2], [3] is presented below. Based on it, the new recursive ultrasound imaging technique according to the
15 invention is mathematically derived and discussed below.

One of the problems in emitting with only one element is the signal-to-noise ratio, since there are physical limitations to what power can be sent with a single transducer array element. The problem was previously studied [2], [4], and a solution using multiple elements in transmit was suggested in [2]. This problem is discussed below.

- 20 The other problem is the presence of motion artifacts due to the time of acquisition for a single image. This is avoided with the invention by decreasing the number of emissions necessary to create one frame. This can be done with a sparse synthetic aperture, and the results of the decreased number of emissions is presented.

Prior art synthetic array imaging

- 25 Phased linear arrays are used for creating sector B-mode images as shown on Fig. 2. The image consists of a number of scan lines N_l . The scan lines $l = (1..N_l)$ have a common origin. Each of them has a different angle θ_l with the normal vector to the

transducer's surface. For simplicity all considerations are made only in the z - x plane, and it is assumed that a single transducer element emits a cylindrical wave propagating at a constant speed c in a linear medium, as shown in Fig. 3.

The measurement situation is shown in Fig. 4. Element i with center coordinates (x_i, z_i) emits a spherical wave. The wave front reaches point $P(x_P, z_P)$ after time

$$t_{iP} = \frac{\sqrt{(x_P - x_i)^2 + (z_P - z_i)^2}}{c}, \quad (2)$$

where c is the speed of sound. If all the elements are excited, they will form a pressure field in front of the transducer, which is a sum of the fields created by each of the elements. The emitted waves reach point P at different time instances depending on the element positions.

In order to align the wave fronts and thereby focus the acoustic energy in point P , the signals from the individual array elements must be appropriately delayed. In the calculation of the delays, one point from the transducer is selected as a reference point. All the delays are calculated relative to the time necessary for a sound wave to travel the distance between the reference point and the focal point. For a sector image, the center of the transducer array is the usual choice. The reference point is the center of element $C(x_C, z_C)$ for the case depicted on Fig. 4. The delay for element i for focusing the energy at point $P(x_P, z_P)$ is calculated by:

$$d_i = t_{CP} - t_{iP}$$

$$d_i = \frac{\sqrt{(x_C - x_P)^2 + (z_C - z_P)^2} - \sqrt{(x_i - x_P)^2 + (z_i - z_P)^2}}{c} \quad (3)$$

Fig. 5 shows the geometry used for the simulations. The origin of the coordinate system $O(0,0)$ lies in the middle of the physical linear array transducer. All scan-lines ($l = 1..N_l$) start from the origin O and have angle θ_l with the z -axis. The focal points lie on these scan lines and have coordinates:

$$\begin{aligned} x_{\theta} &= r_f \cdot \sin \Theta_l \\ z_{\theta} &= r_f \cdot \cos \Theta_l \end{aligned} \quad (4)$$

where r_f is the axial distance to the focal point. Dynamic focusing is obtained if r_f changes in time as

$$r_f = ck/f_s \quad (5)$$

- 5 where k is the sample number and f_s is the sampling frequency. In conventional imaging systems the transmission uses a fixed r_f , whereas the receive can be dynamically focused along the current scan line.

One way to create a synthetic aperture image is to emit with all the elements from the transducer array one at a time (see Fig. 6). During reception data is recorded and
10 beam formed. After a number of emissions N_{xmt} all the beam formed RF lines from the separate emissions are summed to create the scan-lines that are envelope-detected and displayed.

The beam formed signal from emission n with element i for line l is $s_{li}^{(n)}(t)$. The number for the emission n ($0 < n < \infty$) is relative to the beginning of the continuous
15 imaging process. This number is relevant only for the recursive imaging and in this section a simplified notation is used: $s_{li}(t) = s_{li}^{(n)}(t)$. The time t is relative time from the emission of the pulse. The RF signal that is envelope-detected and displayed is:

$$s_l(t) = \sum_{i=1}^{N_{xmt}} s_{li}(t) \quad (6)$$

$$s_{li}(t) = \sum_{j=1}^{N_{rcv}} a_{lij} \cdot s_{ij}(t - d_{lij}) \quad (7)$$

- 20 where N_{xmt} is the number of transmit elements, N_{rcv} is the number of receive elements, $s_{ij}(t)$ is the recorded data, a_{lij} is a weighting coefficient (apodization), and d_{lij} is the delay for image line l , when emitting with element i and receiving with element j .

The delays d_{lij} is the sum of the delays for elements i and j calculated with formula (3) for the points in line l

$$d_{lij} = d_{li} + d_{lj}$$

For the case in Fig. 5, the delays are calculated by:

$$d_{lij} = \frac{\sqrt{x_{fl}^2 + z_{fl}^2} - \sqrt{(x_i - x_{fl})^2 + z_{fl}^2}}{c} + \frac{\sqrt{x_{fl}^2 + z_{fl}^2} - \sqrt{(x_j - x_{fl})^2 + z_{fl}^2}}{c} \quad (8)$$

This is the basic formula for a geometrical quadrature focusing. In Eq. (8) (x_{fl}, z_{fl}) are the coordinates of the focal point, x_j is the coordinate of the center of the j 'th element and x_i is the coordinate of the center of the i 'th element. In transmit, the delay for element i is equal to zero, and in receive the delay for element j is equal to d_{lij} .

- 10 The synthetic array imaging assumes that the tissue under investigation is stationary, which is often not the case in medical ultrasound. The images will, thus, be blurred and the synthetic array imaging cannot be used for velocity estimation.

Summary of the invention

- 15 It is the object of the invention to overcome this deficiency and disadvantage of the known kinds of apparatus. With the invention this object is achieved by an apparatus that continually updates the image using the current pulse emission thereby obtaining a continuous image for tracking moving structures.

- The concept of the invention is as follows: A new frame n is created, based on the previous frame $n-1$ and the data acquired at the last emission. The calculation
20 procedure is derived from a synthetic array aperture imaging technique as presented and further developed.

Recursive imaging with the invention

A simple example for synthetic imaging is shown in Fig. 6. Here n is the number for the current emission and N_{xmt} is the number of transmissions between two emissions

with the same element. $s_{lk}^{(n)}$ is the beam formed signal at emission n with element k for line l . The relation between n and k is given by:

$$k(n) = (n \bmod N_{xmt}) + 1 \quad (9)$$

The first image can be obtained after N_{xmt} emissions. Equation (6) can be rewritten as:

$$S_l^{(n)} = \sum_{m=(n-N_{xmt}+1)}^n a_{k(m)} \cdot s_{lk(m)}^{(m)}(t) \quad (10)$$

Equation (10) shows that a new frame can be formed after any emission $n \geq N_{xmt}$ by summing the beam formed lines $s_{lk(m)}^{(m)}$, $n - N_{xmt} < m \leq n$. For two consecutive emissions the expression is:

$$S_l^{(n-1)}(t) = \sum_{m=(n-N_{xmt})}^{n-1} a_{k(m)} \cdot s_{lk(m)}^{(m)}(t) \quad (11)$$

10

$$S_l^{(n)}(t) = \sum_{m=(n-N_{xmt}+1)}^n a_{k(m)} \cdot s_{lk(m)}^{(m)}(t)$$

$$S_l^{(n)} - S_l^{(n-1)} = a_{k(n)} \cdot s_{lk(n)}^{(n)}(t) - a_{k(n-N_{xmt})} \cdot s_{lk(n-N_{xmt})}^{(n-N_{xmt})}(t) \quad (12)$$

$$S_l^{(n)} = S_l^{(n-1)} + a_{k(n)} \cdot s_{lk(n)}^{(n)}(t) - a_{k(n-N_{xmt})} \cdot s_{lk(n-N_{xmt})}^{(n-N_{xmt})}(t)$$

From equation (9) it can be seen that $k(n) = k(n - N_{xmt})$. In recursive imaging a new frame is created at emission n by adding the new information $Info^{(n)}$ to the image $Image^{(n-1)}$ and subtracting the information obtained at emission $n - N_{xmt}$, $Info^{(n-N_{xmt})}$. The number of summations per sample is decreased from N_{xmt} in Eq. (6) to only two.

Since a new frame consisting of a number of simultaneously beam formed lines is created at every pulse emission, the image is updated after every 200 μ s when $c =$ 1540 m/s, and the data is acquired to a depth of 15 cm.

Add-only recursive imaging

To decrease the amount of the necessary storage memory the calculation procedure can be modified to the *add-only recursive imaging*.

Consider the following equations:

$$B = \sum_{i=1}^N A_i \quad (13)$$

$$5 \quad A_i = A = \text{const} \Rightarrow$$

$$B = N \cdot A = N \cdot A + A - A = \frac{N-1}{N} \cdot N \cdot A + A = \frac{N-1}{N} \cdot B + A \quad (14)$$

The above equations can be used to derive another formula for the recursive imaging:

$$S_i^{(n)}(t) = c_1 \cdot S_i^{(n-1)} + c_2 \cdot s_{ik}^{(n)}(t) \quad (15)$$

where c_1 and c_2 are weighting coefficients. The constants must be chosen to ensure a
10 constant signal level and the following condition must be fulfilled: $S_i^{(n)}(t) = S_i^{(n-1)}(t)$.

The difference between equations (12) and (15), is that instead of being subtracted the
information obtained by emitting with element k decays exponentially with time. In
this way the information from the past is less prone to introduce motion artifacts in
the image. The other benefit is that less memory is needed, since only two frames are
15 stored.

Equation (15) can be rewritten as a sum of the signals from two consecutive
emissions:

$$S_i^{(n)}(t) = \sum b^{n-m} \cdot s_{lk(m)}^{(m)}(t) + s_{lk(n)}^{(n)}(t) \quad (16)$$

assuming that $c_2 = 1$ and $c_1 = b \leq 1$. $N_{xmt} < n < \infty$ is the number of the frame, which is
20 equal to the number of the current emission. The same element is used after every N_{xmt}
emissions. Equation (16) can be expressed as a sum of the contributions from the
emissions with the different elements:

$$S_i^{(n)}(t) = \sum_{k=1}^{N_{xmt}} C_{ik}^{(n)}(t) \quad (17)$$

Here contribution of one element is the amount of information $C_{ik}^{(n)}$, added to the signal $S_i^{(n)}$ by the emissions with element k up to the moment of emission n . The contribution of the current emitting element ($k(n) = i$) to $S_i^{(n)}$ is:

$$5 \quad C_{ii}^{(n)}(t) = s_{ii}^{(n)}(t) + b^{N_{xmt}} \cdot s_{ii}^{(n-N_{xmt})}(t) + b^{2N_{xmt}} \cdot s_{ii}^{(n-2N_{xmt})}(t) + \dots \quad (18)$$

This is a geometrical progression. If the tissue is motionless then:

$$s_{ii}^{(n)}(t) = s_{ii}^{(n-N_{xmt})}(t) = \dots = s_{ii}(t)$$

$$C_{ii}^{(n)}(t) = [1 + b^{N_{xmt}} + b^{2N_{xmt}} + \dots] s_{ii}(t) = s_{ii}(t) \cdot \sum_{p=0}^{\infty} b^{pN_{xmt}} = s_{ii}(t) \cdot \frac{1}{1 - b^{N_{xmt}}} \quad (19)$$

If $b = 0.8$ and $N_{xmt} = 64$ then $C_{ii}^{(n)}(t) \approx s_{ii}^{(n)}(t)$. This means that at emission n the contribution from the emitting element is approximately equal to the newly acquired information.

With the chosen values of b and N_{xmt} the contribution to the signal S_i from the previous emission with the same element is 128 dB lower than the contribution from the current one and motion artifacts can be neglected.

15 **Improving the signal-to-noise ratio**

The advantage of the above presented imaging approach is that a dynamically focused image in transmit and receive is obtained. This is possible because a single small transducer element emits an almost spherical wave, which unambiguously determines the propagation time of the ultrasound energy.

20 The drawback is that the energy, which can be sent into the body with only one array element is not enough for obtaining a high penetration depth. One way to increase the penetration depth is to emit energy with several elements as suggested in [2]. The

delays of the elements are set in order to approximate the radiation pattern of a single element. Here the delays are calculated by:

$$d_{i_a} = \frac{R_{xmt} - \sqrt{R_{xmt}^2 - (x_{i_a} - x_a)^2}}{c} \quad (20)$$

- where a is the index of the central element, x_a is the coordinate of the central element of the active aperture, x_{i_a} is the coordinate of the element whose delay in transmit d_{i_a} is calculated, and R_{xmt} is the radius of the spherical wave. If the number of elements in the active aperture is N_{active} , then R_{xmt} is selected to fulfill the condition:

$$R_{xmt} \geq (N_{active} - 1)/2 \cdot pitch \quad (21)$$

- where $pitch$ is the distance between the centers of two neighbor elements in the array.
- 10 The elements' indices are relative to the index of the central element and are given by:

$$i_a = -(N_{active} - 1)/2 \dots (N_{active} - 1)/2 \quad (22)$$

For convenience N_{active} is usually an odd number to ensure the presence of a central element. The delays in receive are calculated by formula (8), assuming that the transmitting element has the coordinate x_a .

- 15 The result of using multiple elements in transmit is that the signal-to-noise-ratio is increased. Let the number of transmissions be N_{xmt} and the number of receiver elements N_{rcv} . Then the signal-to-noise ratio is proportional to:

$$SNR \sim \sqrt{N_{xmt} \cdot N_{rcv}} \quad (23)$$

- If the number of the elements in the active sub-aperture is N_{active} then the SNR becomes proportional to:
- 20

$$SNR \sim \sqrt{N_{active} \cdot N_{xmt} \cdot N_{rcv}}$$

Thus, using an active aperture in transmit with $N_{active} = 11$ results in an 11 dB increased in SNR.

By using this approach a continuous image consisting of a number of simultaneously beam formed lines can be made at the pulse repetition frequency of the emitted ultrasound, which makes it possible to follow tissue motion.

By using a array transducer a sector scan image can be made.

- 5 By using a matrix transducer a volumetric image can be made.

By using several transducer elements during the transmission an improved signal-to-noise ratio can be obtained.

By using recursive imaging velocity images can be improved and velocity distributions can be found throughout the image.

10 ***Brief description of the drawings***

Fig 1 shows a schematic block diagram of the main components of the system.

Fig 2 shows a sector image created with phased linear array transducer.

Fig 3 shows a radiation pattern of a single transducer element.

- 15 Fig 4 shows the distance traveled by the ultrasound signals from each of the transducer elements to a point P.

Fig 5 shows a delay calculation. The reference point is $O(0,0)$. The focal point $f(x_f, z_f)$ lies on the current scan line l. The z coordinate of the transducer elements is zero, and it is not used in the notations for simplicity.

- 20 Fig 6 shows the creation of a synthetic transmit aperture image. The black square indicates the position of the element used for emission.

Fig 7 shows an approximation of the radiation pattern of a single element with a sub-aperture containing 11 elements. The indices of the elements are relative to the center of the sub-aperture.

Fig 8 shows the excitation pulse used in the simulations.

Fig 9 shows an illustration of the notation in the plots of the point-spread function. The number of the scan line determines the angle.

Fig 10 shows the relation between the number of the skipped elements between two emissions and number of emissions. On this Figure a linear array with 7 transducer elements is shown. The number of elements that are skipped is 2, indicating 3
5 emissions.

Fig 11 shows a point-spread function of a synthetic transmit array focusing system.
 $N_{xmt} = 64, N_{active} = 1$.

Fig 12 shows a point-spread function of a synthetic transmit array focusing system.
10 $N_{xmt} = 13, N_{active} = 1$.

Fig 13 shows a point-spread function of a synthetic transmit array focusing system.
 $N_{xmt} = 64, N_{active} = 11$.

Fig 14 shows a point-spread function of a synthetic transmit array focusing system.
 $N_{xmt} = 64, N_{active} = 11$. Transmit apodization is applied.

15 ***Description of the preferred embodiment***

In Fig. 1 is shown an example of a preferred embodiment of an apparatus according to the invention. This embodiment of the invention has its application within diagnostic medical ultrasound.

A typical example is visualization of the organs in the human body or the
20 determination of blood flow.

In Fig. 1 the specific setup of the measuring apparatus itself is indicated schematically. It comprises a generator or pulser 1, an emit beam former 2 for selecting the transmission elements, a linear array ultrasound emitting transducer 3, a linear array ultrasound receiving transducer 5, a receive beam former 6 receiving signals from the
25 receiving transducer 5; and an update processor for recursively updating the images.

The pulser 1 generates a pulsed voltage signal with sinusoidal oscillations at a frequency of 3 MHz in each pulse, that is fed to the emit beam former 2. The emit beam former 2 splits up the signal from the pulser into a plurality of signals which are being fed to one or more of the respective elements of the emitting transducer array 3.

5 The emit beam former 2 is capable of individually attenuating and delaying the signals to each or some of the elements of the transducer array 3. The ultrasound is then reflected by the object 4 and received by the elements of the transducer array 5. All of these signals are then combined to focus all of the beams in the image in both transmit and receive in the beam processor 6 and the simultaneously focused signals

10 are used for updating the image in the processor 7.

In the preferred embodiment the same linear array transducer is used for both emitting and receiving the pulsed ultrasound field. It consists of 64 elements with an element width of 0.26 mm and a spacing between neighboring elements of 0.03 mm. The height of the elements is 10 mm.

15 Simulations experimentally document the functionality of the apparatus. The simulation is performed using the impulse response method developed by Topholme and by Stepanishen [5] in the implementation developed by Jensen and Svendsen [7]. The high accuracy of this approach, when compared to measurements, is described in Jensen [8]. The paper showed that the simulations were within 1% of the measured

20 ultrasound fields. The simulation approach is applicable for pulsed fields and is used for three-dimensional modeling the response of multiple scatterers.

In the preferred embodiment individual elements are pulsed consecutively and the received signals are measured on all the elements of the transducer. The ultrasound beams are then focused in both transmit and receive in all directions of the image.

25 After each emission the old information from the previous emission with the element is subtracted and the new information added. The image is thereby continuously updated.

The simulation parameters are listed in Table 1 and Table 2. A sampling frequency of $f_s = 105$ MHz is used for the simulations in order to get high precision in the

numerical calculations of the acoustical field. However, when creating the results, the signal is decimated 10 times after the beam forming. The excitation pulse used is shown in Fig. 8.

5 The point spread function (psf) details the quality of the ultrasound system. It was obtained by placing a point scatterer in front of the transducer, and creating a B-mode image (transmit - reflect - receive). The RF lines are envelope detected by a Hilbert transformation and logarithmically compressed.

The displayed images are 90° phased array images. The scan-conversion algorithm performs a bi-linear interpolation before displaying the images.

10 The plots of the point-spread function are created by taking the maximum value of the envelope-detected signal (see Fig. 9). On the plots, RANGE denotes the maximum axial distance from the transducer, START and END determine the depth range for the point-spread functions. Axial distance shows the depth at which the maximum of the signal is found.

15 Another parameter given on the figures is "Number of skipped elements". It indicates how many emissions are made before the same element is used again. The relation between these parameters are given in Fig. 10.

The elements are always used in transmit in the same order. For instance in Fig. 10 this means that the emission order in time is 1, 4, 7, 1, 4, 7, . This is necessary when
20 equation (12) is used for imaging because it involves subtracting the information from the previous emission. However, if equation (15) is used, the elements can "interleave" and have a different emission patterns, e.g., 1, 4, 7, 2, 5, 3, 6, 1, 4, 7 .. The received signals, are not weighted (i.e. there is no apodization in transmit).

Fig. 11 shows the psf for 64 emissions with one element at a time. Reducing the
25 number of transmitting elements to 13 gives the pfs shown in Fig. 12. The data for the psfs are shown in Table 3.

In order to increase the penetration depth and the signal-to-noise ratio, more than one element can be used during transmission. The idea is to send a spherical wave with eleven elements. A Hanning window is applied on the amplitudes of the sending elements. The received signals are not weighted (no transmit apodization is applied).

- 5 Fig. 13 shows the psf for 64 emissions, and Fig. 14 when apodization is used during the emissions. The data for the psfs are shown in Table 4.

Tables

System parameter	Notation	Value	Unit
Speed of sound	c	1540	m/s
Central frequency of excitation	f_0	3	MHz
Central wavelength of excitation	λ_0	0.51333	mm
Sampling frequency	f_s	105	MHz
Oscillation periods	N_{osc}	3	

Table 1: General parameters.

Transducer parameter	Notation	Value	Unit
Central transducer frequency	$f_0^{(tr)}$	3	MHz
pitch	pitch	0.257	mm
Width of a single element	w	0.227	mm
Kerf	Krf	0.030	mm
Height of the element	h	10	mm
Number of receive elements	N_{rev}	64	
Relative two-sided -6 dB bandwidth	B	≥ 70	%

Table 2: Parameters of the simulated phased array transducer

5

Number of emissions	-3 dB bandwidth	-40 dB bandwidth	Position of grating lobe	Grating lobe level
64	1.01 °	5.03 °	-	-
22	1.01 °	5.03 °	$\pm 40^\circ$	-58 dB
13	1.01 °	5.03 °	$\pm 20^\circ$	-54 dB
10	1.01 °	5.03 °	$\pm 16^\circ$	-51 dB
8	1.01 °	5.03 °	$\pm 13^\circ$	-48
dB	1.01 °	5.03 °	$\pm 10^\circ$	-45 dB

Table 3: The point spread function of a system with $N_{active} = 1$.

Number of emissions	-3 dB bandwidth	-40 dB bandwidth	Position of grating lobe	Grating lobe level
64	1.01 °	5.03 °	-	-
13	1.01 °	5.03 °	$\pm 20^\circ$	-53 dB
8	1.01 °	5.03 °	$\pm 13^\circ$	-48 dB

Table 4: The point spread function of a system with $N_{active} = 11$.

References

- [1] K. E. Thomenius. Evolution of ultrasound beam formers. In *Proc. IEEE Ultrason. Symp.*, pages 1615-1621, 1996.
- 5 [2] G. R. Lockwood, J. R. Talman, and S. S. Brunke. Real-time 3-d ultrasound imaging using sparse synthetic aperture beam forming. *IEEE Trans. Ultrason., Ferroelec., Freq. Contr.*, 45:980-987, 1998.
- [3] G. R. Lockwood and F.S. Foster. Design of sparse array imaging systems. In *Proc. IEEE Ultrason. Symp.*, pages 1237-1243, 1995.
- 10 [4] J. T. Ylitalo. On the signal-to-noise ratio of a synthetic aperture ultrasound imaging method. *Eur. J. Ultrasound*, pages 277-281, 1996.
- [5] G. E. Tupholme. Generation of acoustic pulses by baffled plane pistons. *Mathematika*, 16:209-224, 1969.
- [6] P. R. Stepanishen. Transient radiation from pistons in an infinite planar baffle. *J. Acoust. Soc. Am.*, 49:1629-1638, 1971.
- 15 [7] J. A. Jensen and N. B. Svendsen. Calculation of pressure fields from arbitrarily shaped, apodized, and excited ultrasound transducers. *IEEE Trans. Ultrason., Ferroelec., Freq. Contr.*, 39:262-267, 1992.
- [8] J. A. Jensen. A model for the propagation and scattering of ultrasound in tissue. *J. Acoust. Soc. Am.*, 89:182-191, 1991a.

Claims

1. An apparatus for acquiring images of an object, the apparatus comprising:
a generator for generating excitation signals of multiple pulses of wave energy, and an
emitting transducer with a plurality of transducer elements for transforming said
5 excitation signals into pulses of wave energy and, using, for each pulse of wave
energy, selected ones of said transducer elements, for emitting said pulses of wave
energy towards said object,
a plurality of receiving transducer elements for receiving, from said object, signals
generated by interaction between said emitted pulses of wave energy and said object,
10 a receive beam former for delaying and processing signals from said plurality of
receiving transducer elements individually relative to each other,
and a processor for processing delayed signals from said plurality of receiving
transducer elements to form images of said body, where a predetermined number of
processed and delayed signals are used to form an image,
15 wherein images are updated with a number less than said predetermined number of
processed and delayed signals.
2. An apparatus according to claim 1 wherein images are updated after each emission
of energy.
3. An apparatus according to claim 2 wherein focused simultaneous beams are
20 updated after each emission of energy according to

$$S_i^{(n-1)}(t) = \sum_{m=(n-Nxmt)}^{n-1} a_{k(m)} \cdot S_{lk(m)}^{(m)}(t)$$

$$S_i^{(n)}(t) = \sum_{m=(n-Nxmt+1)}^n a_{k(m)} \cdot S_{lk(m)}^{(m)}(t)$$

$$S_i^{(n)} = S_i^{(n-1)} + a_{k(n)} \cdot S_{lk(n)}^{(n)}(t) - a_{k(n-Nxmt)} \cdot S_{lk(n-Nxmt)}^{(n-Nxmt)}(t)$$

where $s_{lk}^{(n)}$ is the beam formed signal at emission n with element k for image line l , $a_{k(m)}$ is a weighting coefficient, and N_{xmt} is the number of transmissions between two emissions with the same element.

4. An apparatus according to claim 2 wherein said focused simultaneous beams are
5 updated after each emission of energy according to

$$S_l^{(n)}(t) = c_1 \cdot S_l^{(n-1)} + c_2 \cdot s_{lk}^{(n)}(t) \quad (24)$$

where c_1 and c_2 are weighting coefficients.

5. An apparatus according to claim 2 wherein said wave energy is sound energy.
6. An apparatus according to claim 2 wherein said sound energy is ultrasound energy.
- 10 7. An apparatus according to claim 2 wherein said wave energy is electromagnetic energy.
8. An apparatus according to claim 1 wherein a number of elements are used at the same time during transmission.
9. An apparatus according to claim 8 wherein said focused beams are updated after
15 each emission of energy.
10. An apparatus according to claim 9 wherein said focused beams are updated after each emission of energy according to

$$S_l^{(n-1)}(t) = \sum_{m=(n-N_{xmt})}^{n-1} a_{k(m)} \cdot s_{lk(m)}^{(m)}(t)$$

$$S_l^{(n)}(t) = \sum_{m=(n-N_{xmt}+1)}^n a_{k(m)} \cdot s_{lk(m)}^{(m)}(t)$$

$$S_l^{(n)} = S_l^{(n-1)} + a_{k(n)} \cdot s_{lk(n)}^{(n)}(t) - a_{k(n-N_{xmt})} \cdot s_{lk(n-N_{xmt})}^{(n-N_{xmt})}(t)$$

- where $s_{lk}^{(n)}$ is the beam formed signal at emission n with element k for image line l ,
20 $a_{k(m)}$ is a weighting coefficient, and N_{xmt} is the number of transmissions between two emissions with the same element.

11. An apparatus according to claim 9 wherein said focused beams are updated after each emission of energy according to

$$S_i^{(n)}(t) = c_1 \cdot S_i^{(n-1)} + c_2 \cdot S_{ik}^{(n)}(t) \quad (25)$$

where c_1 and c_2 are weighting coefficients.

5 12. An apparatus according to claim 9 wherein said wave energy is sound energy.

13. An apparatus according to claim 9 wherein said sound energy is ultrasound energy.

14. An apparatus according to claim 9 wherein said wave energy is electromagnetic energy.

10 15. A method for acquiring images of an object, the method comprising:

generating excitation signals of multiple pulses of wave energy,

transforming, using a transducer with a plurality of transducer elements, said excitation signals into pulses of wave energy and, using, for each pulse of wave energy, selected ones of said transducer elements, for emitting said pulses of wave energy towards said object,

15 receiving from said object, using a transducer with a plurality of transducer elements, signals generated by interaction between said emitted pulses of wave energy and said object,

delaying and processing signals from said plurality of receiving transducer elements individually relative to each other,

20 processing delayed signals from said plurality of receiving transducer elements to form images of said body, where a predetermined number of processed and delayed signals are used to form an image,

wherein images are updated with a number less than said predetermined number of processed and delayed signals.

16. A method according to claim 15 wherein images are updated after each emission of energy.

5 17. A method according to claim 16 wherein focused simultaneous beams are updated after each emission of energy according to

$$\begin{aligned}
 S_l^{(n-1)}(t) &= \sum_{m=(n-N_{xmt})}^{n-1} a_{k(m)} \cdot S_{lk(m)}^{(m)}(t) \\
 S_l^{(n)}(t) &= \sum_{m=(n-N_{xmt}+1)}^n a_{k(m)} \cdot S_{lk(m)}^{(m)}(t) \\
 S_l^{(n)} &= S_l^{(n-1)} + a_{k(n)} \cdot S_{lk(n)}^{(n)}(t) - a_{k(n-N_{xmt})} \cdot S_{lk(n-N_{xmt})}^{(n-N_{xmt})}(t)
 \end{aligned}$$

where $S_{lk}^{(n)}$ is the beam formed signal at emission n with element k for image line l , $a_{k(m)}$ is a weighting coefficient, and N_{xmt} is the number of transmissions between two
 10 emissions with the same element.

18. A method according to claim 16 wherein focused simultaneous beams are updated after each emission of energy according to

$$S_l^{(n)}(t) = c_1 \cdot S_l^{(n-1)} + c_2 \cdot S_{lk}^{(n)}(t) \quad (24)$$

where c_1 and c_2 are weighting coefficients.

15 19. A method according to claim 16 wherein said wave energy is sound energy.

20. A method according to claim 16 wherein said sound energy is ultrasound energy.

21. A method according to claim 16 wherein said wave energy is electromagnetic energy.

20 22. A method according to claim 15 wherein a number of elements are used at the same time during transmission.

23. A method according to claim 22 wherein said focused beams are updated after each emission of energy.

24. A method according to claim 23 wherein said focused beams are updated after each emission of energy according to

$$\begin{aligned}
 S_l^{(n-1)}(t) &= \sum_{m=(n-N_{xmt})}^{n-1} a_{k(m)} \cdot S_{lk(m)}^{(m)}(t) \\
 S_l^{(n)}(t) &= \sum_{m=(n-N_{xmt}+1)}^n a_{k(m)} \cdot S_{lk(m)}^{(m)}(t) \\
 S_l^{(n)} &= S_l^{(n-1)} + a_{k(n)} \cdot S_{lk(n)}^{(n)}(t) - a_{k(n-N_{xmt})} \cdot S_{lk(n-N_{xmt})}^{(n-N_{xmt})}(t)
 \end{aligned}$$

where $S_{lk}^{(n)}$ is the beam formed signal at emission n with element k for image line l , $a_{k(m)}$ is a weighting coefficient, and N_{xmt} is the number of transmissions between two emissions with the same element.

25. A method according to claim 23 wherein said focused beams are updated after each emission of energy according to

$$S_l^{(n)}(t) = c_1 \cdot S_l^{(n-1)} + c_2 \cdot S_{lk}^{(n)}(t) \quad (25)$$

where c_1 and c_2 are weighting coefficients.

26. A method according to claim 23 wherein said wave energy is sound energy.

27. A method according to claim 23 wherein said sound energy is ultrasound energy.

28. A method according to claim 23 wherein said wave energy is electromagnetic energy.

Figures

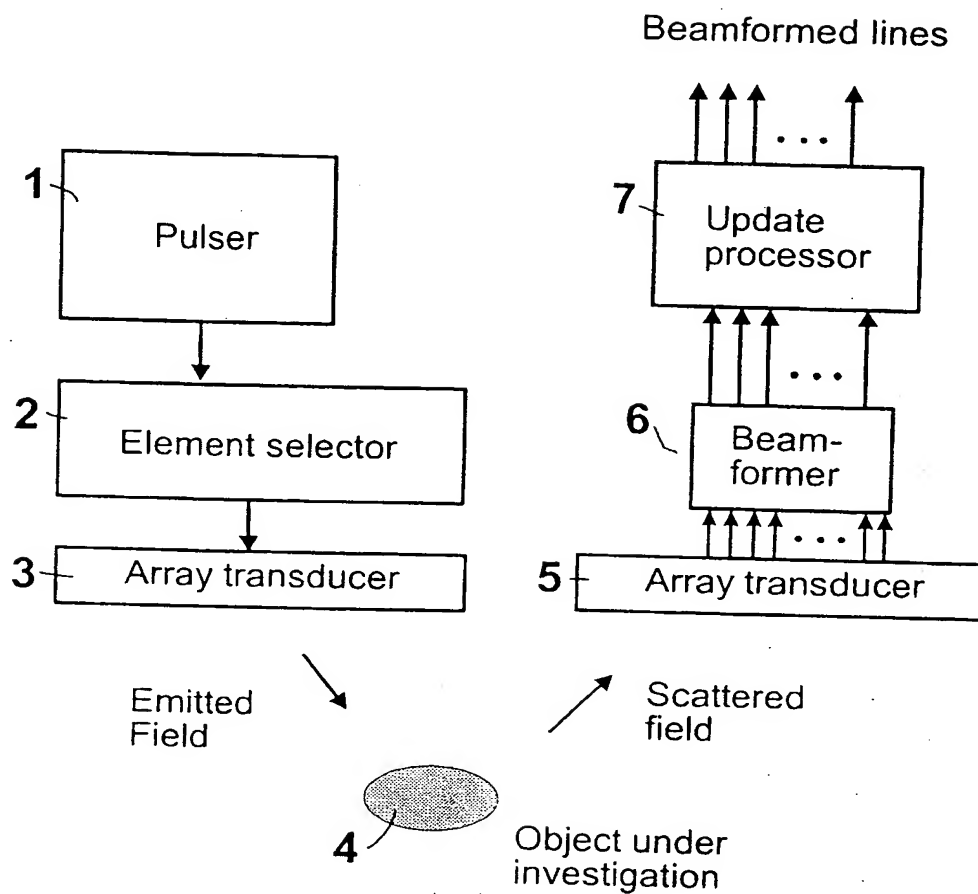


Figure 1: Schematic block diagram of the main components of the system.

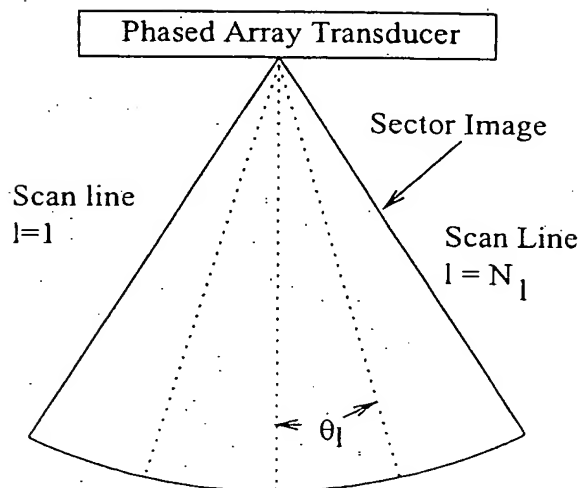


Figure 2: Sector image created with phased linear array transducer.

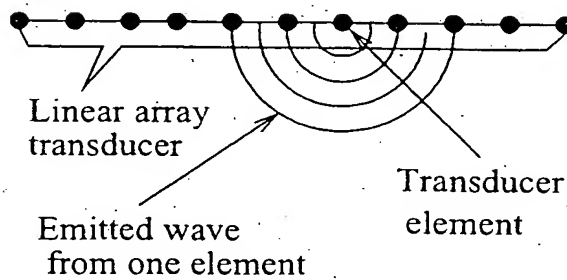


Figure 3: Radiation pattern of a single transducer element.

3/9

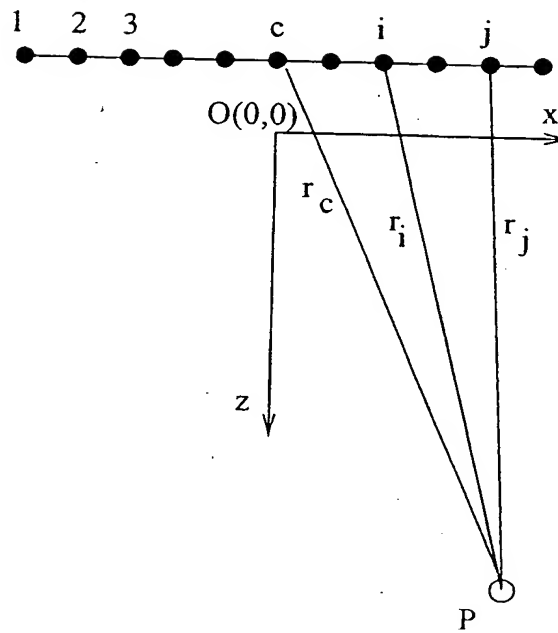


Figure 4: Distance traveled by the ultrasound signals from each of the transducer elements to a point P .

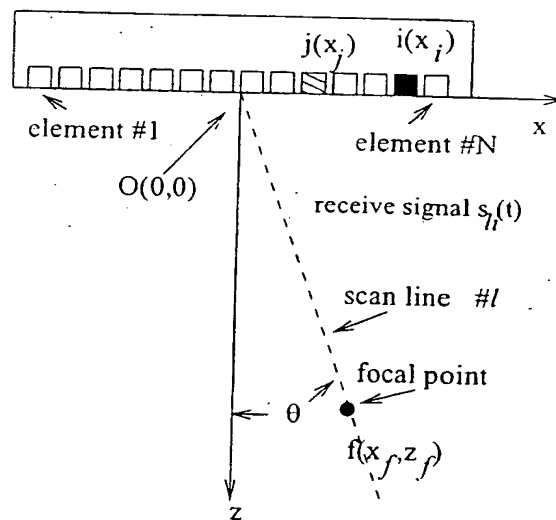


Figure 5: Delay calculations. The reference point is $O(0,0)$. The focal point $f(x_f, z_f)$ lies on the current scan line l . The z coordinate of the transducer elements is zero, and it is not used in the notations for simplicity.

4/9

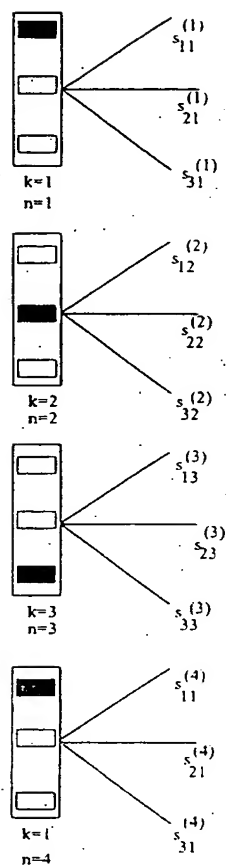


Figure 6: Creating synthetic transmit aperture image. The black square indicates the position of the element used for emission.

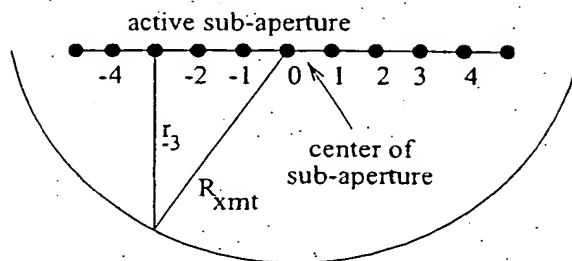


Figure 7: Approximation of the radiation pattern of a single element with a sub-aperture containing 11 elements. The indices of the elements are relative to the center of the sub-aperture.

5/9

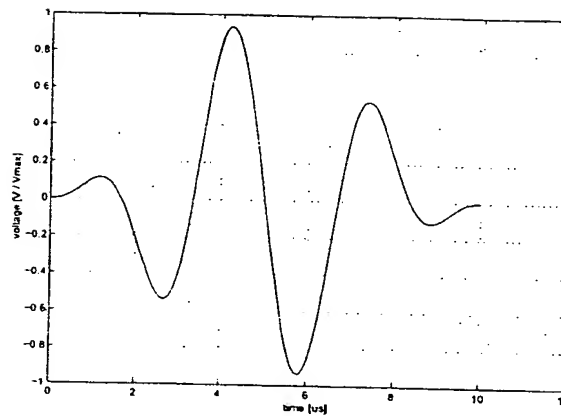


Figure 8: The excitation pulse used in the simulations.

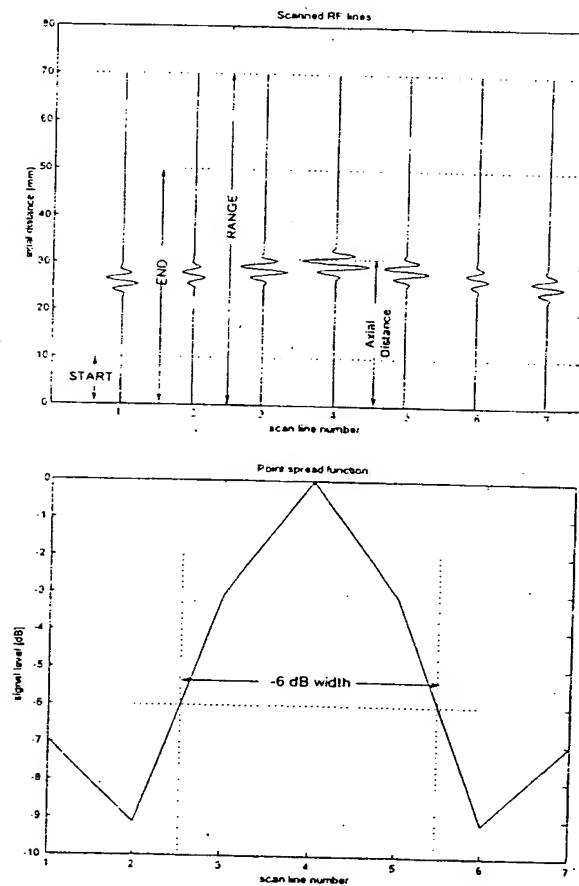


Figure 9: Illustration of the notation in the plots of the point spread function. The number of the scan line determines the angle.

6/9

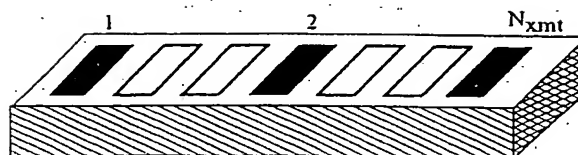


Figure 10: The relation between the number of the skipped elements between two emissions and number of emissions. On this Figure a linear array with 7 transducer elements is shown. The number of elements that are skipped is 2, indicating 3 emissions.

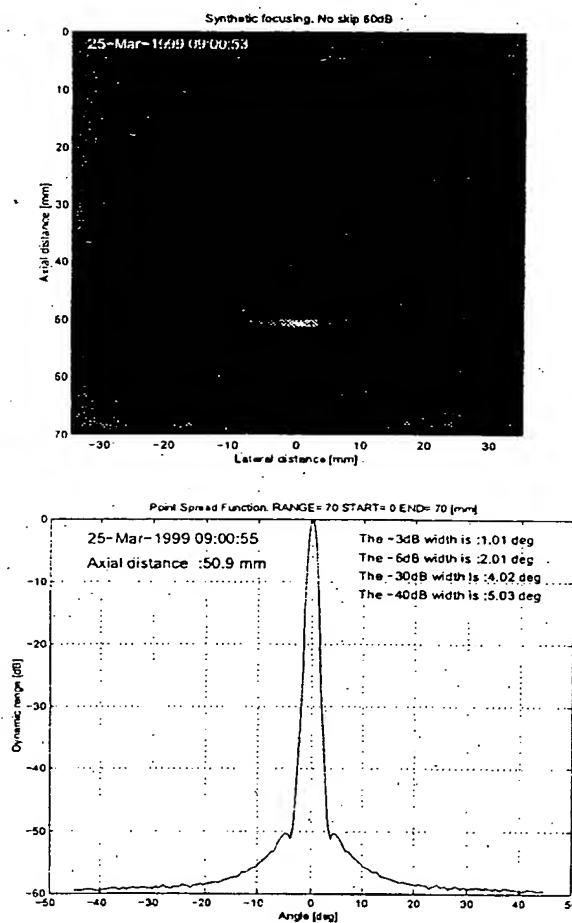


Figure 11: Point spread function of a synthetic transmit array focusing system. $N_{xmt} = 64$, $N_{active} = 1$

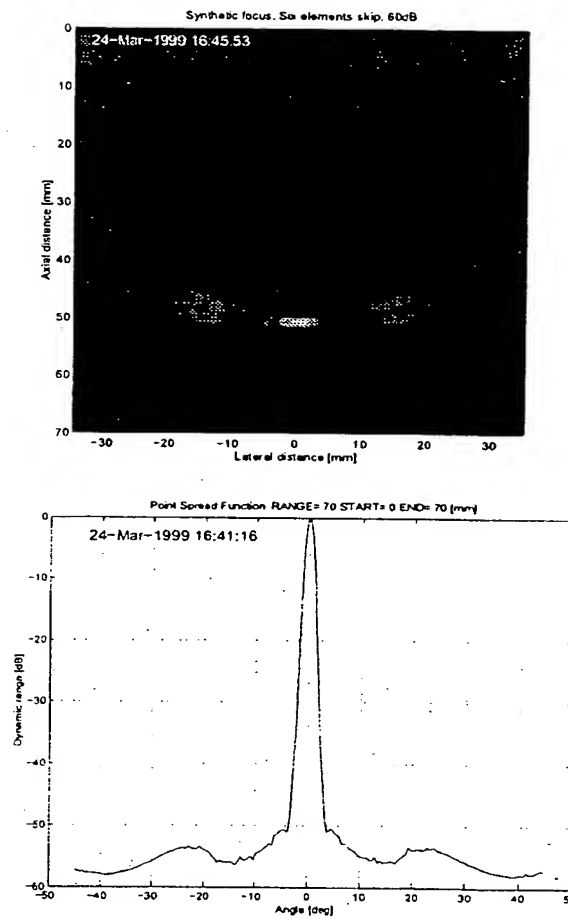


Figure 12: Point spread function of a synthetic transmit array focusing system. $N_{xmit} = 13$, $N_{active} = 1$

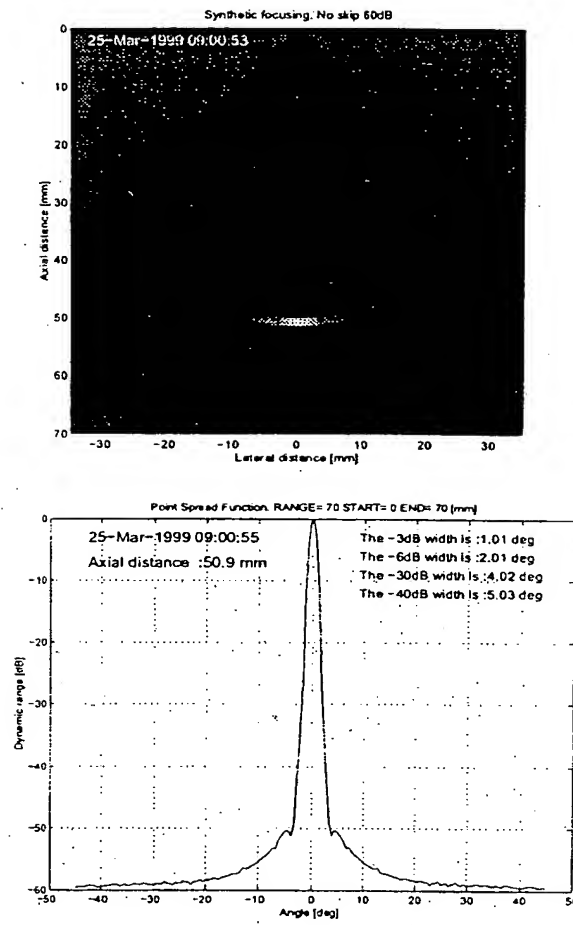


Figure 13: Point spread function of a synthetic transmit array focusing system. $N_{xnt} = 64$, $N_{active} = 11$

9/9

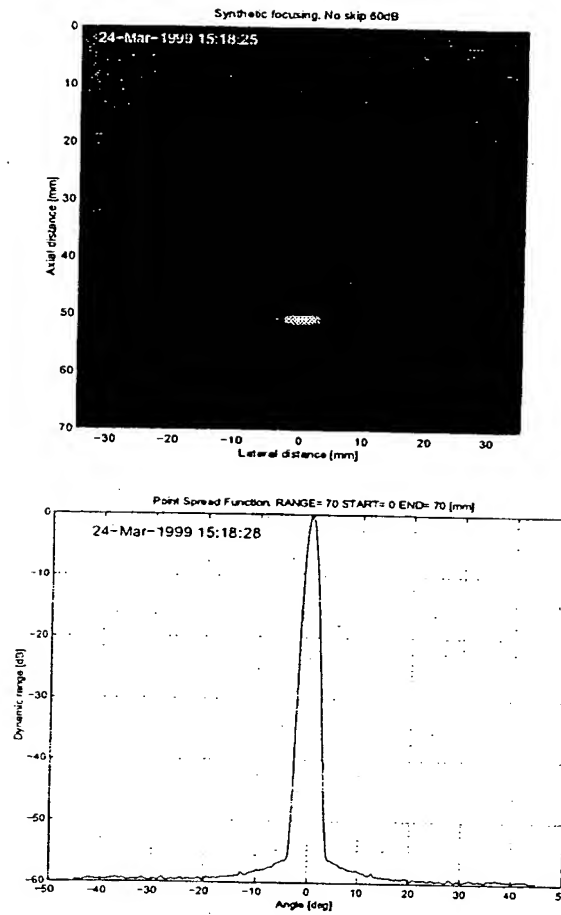


Figure 14: Point spread function of a synthetic transmit array focusing system. $N_{xnu} = 64$, $N_{active} = 11$. Transmit apodization is applied.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00245

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G10K 11/34, G01S 7/52, G01S 15/89

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01S, G10K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5121361 A (HARRISON, JR ET AL), 9 June 1992 (09.06.92), column 3, line 26 - column 4, line 44, figure 1; abstract	1,15
A	US 5345939 A (ENGELER ET AL), 13 Sept 1994 (13.09.94), column 5, line 7 - column 7, line 4, figure 1, abstract	1-28
A	EP 0480086 A (ACOUSTIC IMAGING TECHNOLOGIES CORPORATION), 15 April 1992 (15.04.92), column 3, line 51 - column 4, line 54; figure 1, abstract	1-28

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 August 2000

- 9. 10. 2000

Name and mailing address of the International Searching Authority
European Patent Office P.B. 5818 Patentlaan 2
NL-2280 HV Rijswijk
Tel(+31-70)340-2040, Tx 31 651 epo nl,
Fax(+31-70)340-3016

Authorized officer

Göran Magnusson/MN
Telephone No.

INTERNATIONAL SEARCH REPORT

SA .82403

Information on patent family members

02/12/99

International application No.

PCT/DK 00/00245

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5121361 A	09/06/92	JP 3206986 A	10/09/91
		US 5140558 A	18/08/92
		EP 0480086 A	15/04/92
		US 5119342 A	02/06/92
US 5345939 A	13/09/94	NONE	
EP 0480086 A	15/04/92	US 5119342 A	02/06/92
		US 5121361 A	09/06/92
		US 5140558 A	18/08/92

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)